

# XBee® & XBee-PRO® ZB Adapters

ZigBee® Device Adapters for Drop-in Networking

Easy-to-use adapters bring wireless connectivity to electronic devices in legacy wired applications.



## Overview

XBee & XBee-PRO ZB adapters deliver wireless connectivity to electronic devices through advanced mesh networks. These adapters utilize the ZigBee PRO Feature Set, for robust self-healing, self-configuring networks. They are ideal for wirelessly enabling sensors, controllers and other devices in legacy wired applications, or where a common hardware interface is preferable.


XBee & XBee-PRO ZB adapters can be battery or mains powered. They are available in a wide range of physical interfaces, including RS-232, RS-485, USB (power harvesting), digital I/O and analog I/O. Built upon either low-power and low-cost XBee modules or extended-range XBee-PRO modules, these adapters can be purchased in a broad range of configurations and customized to meet your application needs.

Part of Digi's Drop-in Networking solutions, XBee adapters are compatible with ConnectPort® X gateways, XBee modules and XBee accessories. This family of hardware, software and management tools provides users with unparalleled flexibility and end-to-end communication between devices.

### Related Products



Gateways



Modules



WPAN Adapter



Dev Kits




Network Extenders



Sensors

### Application Highlight

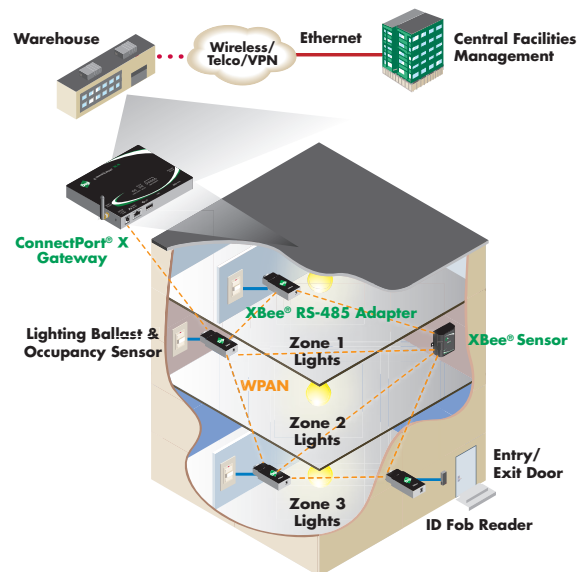

### Features/Benefits

- ZigBee mesh wireless connectivity for all types of end-point devices
- Multiple interface options available for a range of devices including RS-232, RS-485, USB, digital I/O and analog I/O
- ModBus fragmentation support
- Flexible powering options
- Small form factor for easy handling and installation
- Outdoor RF line-of-sight range up to 1 mile with XBee-PRO
- Easy to install and configure for rapid deployment
- Low-power XBee or extended-range XBee-PRO



Platform	XBee® ZB	XBee-PRO® ZB
<b>Performance</b>		
RF Data Rate	250 kbps	
Indoor/Urban Range	Up to 133 ft (40 m)	Up to 300 ft (90 m) / 200 ft (60 m) Int'l variant
Outdoor/RF Line-of-Sight Range	Up to 400 ft (120 m)	Up to 1 mile (1.6 km) / 2500 ft (750 m) Int'l variant
Transmit Power	1.25 mW (+1 dBm) / 2 mW (+3 dBm) boost mode	50 mW (+17 dBm) / 10 mW (+10 dBm) Int'l version
Receiver Sensitivity (1% PER)	-96 dBm in boost mode	-102 dBm
<b>Features</b>		
Antenna Type	XBee ZB Adapters: Internal Antenna; XBee-PRO ZB Adapters: External RPSMA Antenna	
Frequency Band	2.4 GHz	
Serial Data Interface	RS-232 DB9M/DTE or RS-485 (6-position wire terminal block) switch selectable between RS-422 half-duplex, RS-422 full duplex and RS-485	
USB Data Interface	USB 2.0 Full Speed (with ESD protection); connects to host via captive 1-meter cable	
Analog IO (AIO) & Digital IO (DIO)	6-position wire terminal block; Analog IO: 0 - 10V, 4 - 20 mA, or +/- 2VDC Differential; Digital IO: Digital Input or sinking driver output	
NEMA 4X/IP66 Enclosure (Optional)	Fully protected from water, dust and dirt: Internal metal mounting plate; 1 cable inlet with water-tight grommet Dimensions: 7.50 in x 4.50 in x 3.25 in (19.05 cm x 11.43 cm x 8.25 cm)	
<b>Networking &amp; Security</b>		
Network Topologies	Point-to-point, Point-to-multipoint, Mesh	
Number of Channels	16	14
Spread Spectrum Type	Direct Sequence Spread Spectrum	
Filtration Options	PAN ID, 64-bit MAC, channel	
Addressing	65,000 available addresses for each channel	
<b>Other</b>		
LEDs	Power: Glows green when external power is supplied (not active when battery powered to limit power drain) Associate: Blinks when unit is connected and associated on an RF network	
Controls	Device reset (internal push button); Identification (internal push button) - relays ID to gateway	
Dimensions (L x W x H) & Weight	RS-232, RS-485, AIO, DIO models: 3.60 in x 1.90 in x 1.20 in (9.14 cm x 4.82 cm x 3.04 cm) 2.29 oz (64.92 g) USB models: 2.87 in x 1.80 in x 0.83 in (7.29 cm x 4.57 cm x 2.10 cm) 1.60 oz (45.36 g)	
Operating Temperature	-40° C to +70° C	
<b>Power Requirements</b>		
Input Voltage	3.7-6VDC and 9-30VDC options	
Power Supply (RS-232, RS-485, AIO, DIO)	120VAC/240VAC to 5VDC power supply, internal lithium battery pack, or external 6-cell D battery holder (all sold separately)	
Power Consumption	USB: 70 mA (normal operation) / 200 uA (suspend mode)	USB: 70 mA Rx and 250 mA Tx (normal operation) / 200 uA (suspend mode)
USB Model	Bus powered (+5V)	
<b>Regulatory Approvals</b>		
Emissions	FCC Part 15.247, IC, ETSI/CE, Telec, EN55022 (Class B)	
Safety	UL60950, CAN/CSA C22.2 No.60950	
RoHS	Yes	



A complete list of models and part numbers is available at [www.digi.com/products/wireless/zigbee-mesh/xbee-zb-adapters.jsp](http://www.digi.com/products/wireless/zigbee-mesh/xbee-zb-adapters.jsp)

**DIGI SERVICE AND SUPPORT** - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. [www.digi.com/support](http://www.digi.com/support)

**Digi International**  
877-912-3444  
952-912-3444  
info@digi.com

**Digi International France**  
+33-1-55-61-98-98  
www.digi.fr

**Digi International KK**  
+81-3-5428-0261  
www.digi-intl.co.jp

**Digi International (HK) Limited**  
+852-2833-1008  
www.digi.cn



91001420  
D2/1010

BUY ONLINE • [www.digi.com](http://www.digi.com)



© 2008-2010 Digi International Inc. All rights reserved. Digi, Digi International, the Digi logo, the Making Wireless M2M Easy logo, ConnectPort, XBee and XBee-PRO are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective holders. All information provided is subject to change without notice.