


Features

- Wide 2:1 Input Range
- Full SMD-Design
- High Power Density
- High Efficiency up to 86%
- Regulated Outputs
- I/O-isolation 1'500 VDC
- Indefinite Short-Circuit Protection
- Input Filter meets EN 55022, Class A and FCC, Level A without external Components
- Shielded Metal Case with insulated Baseplate
- 24-pin DIP with Industry Standard Pinout
- High Reliability, MTBF >1 Mio. h
- 2 Year Product Warranty

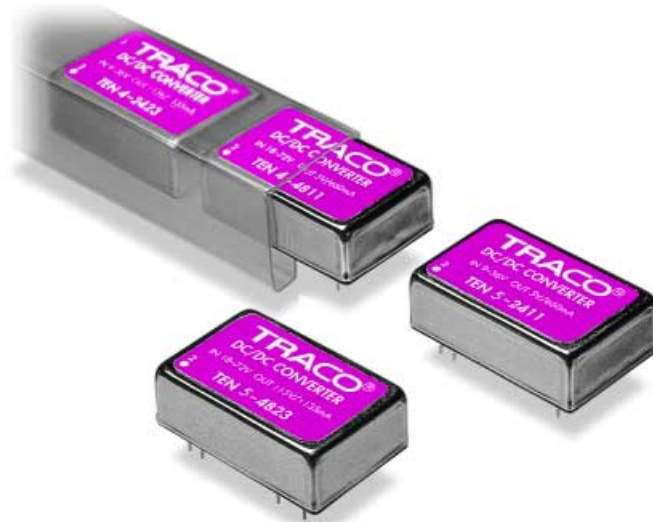

The TEN 5 Series is a range of DC/DC-converter modules with wide input range of 2:1. State of the art SMD-technology guarantees a product with very high reliability and good cost /performance ratio. High efficiency allows an operating temperature range of -40°C to +75°C without derating. I/O-isolation of 1'500 VDC together with conducted noise compliance to EN 55022-A and FCC, level A makes these converters ideal for a wide range of applications in communications, mobile battery powered equipments and industrial systems.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 5-1210	9 – 18 VDC	3.3 VDC	1200 mA	77 %
TEN 5-1211		5 VDC	1000 mA	81 %
TEN 5-1212		12 VDC	500 mA	84 %
TEN 5-1213		15 VDC	400 mA	84 %
TEN 5-1221		± 5 VDC	± 500 mA	81 %
TEN 5-1222		± 12 VDC	± 250 mA	84 %
TEN 5-1223		± 15 VDC	± 200 mA	84 %
TEN 5-2410	18 – 36 VDC	3.3 VDC	1200 mA	79 %
TEN 5-2411		5 VDC	1000 mA	83 %
TEN 5-2412		12 VDC	500 mA	86 %
TEN 5-2413		15 VDC	400 mA	86 %
TEN 5-2421		± 5 VDC	± 500 mA	83 %
TEN 5-2422		± 12 VDC	± 250 mA	86 %
TEN 5-2423		± 15 VDC	± 200 mA	86 %
TEN 5-4810	36 – 75 VDC	3.3 VDC	1200 mA	79 %
TEN 5-4811		5 VDC	1000 mA	83 %
TEN 5-4812		12 VDC	500 mA	86 %
TEN 5-4813		15 VDC	400 mA	86 %
TEN 5-4821		± 5 VDC	± 500 mA	83 %
TEN 5-4822		± 12 VDC	± 250 mA	86 %
TEN 5-4823		± 15 VDC	± 200 mA	86 %

Input Specifications

Input current no load /full load	12 Vin models 24 Vin models 48 Vin models	20 mA / 590 mA typ. 5 mA / 290 mA typ. 3 mA / 145 mA typ.
Start-up voltage / under voltage shut down	12 Vin models 24 Vin models 48 Vin models	8.5 VDC / 8 VDC 16.5 VDC / 16 VDC 32.5 VDC / 32 VDC
Surge voltage (1 sec. max.)	12 Vin models 24 Vin models 48 Vin models	25 V max. 50 V max. 100 V max.
Reverse voltage protection		1.0 A max.
Conducted noise (input)		EN 55022 level A, FCC part 15, level A

Output Specifications

Voltage set accuracy		± 1 %
Regulation	– Input variation Vin min. to Vin max. – Load variation 10 – 100 % – single output models – dual output models balanced load – dual output models unbalanced load	± 0.3 % max. ± 1 % max. ± 1 % max. ± 3 % max.
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk max.
Temperature coefficient		± 0.02 % / °C
Output current limitation		>110 % of Iout max., constant current
Short circuit protection		hiccup mode, indefinite (automatic recovery)
Capacitive load	– single output models – dual output models	6800 µF max. 1000 µF max.

General Specifications


Temperature ranges	– Operating – Case temperature – Storage	– 40 °C ... + 75 °C (no derating) + 95 °C max. – 40 °C ... + 125 °C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217 E)		>1 Mio. h @ + 25 °C
Isolation voltage	Input/Output	1'500 VDC
Isolation capacity	Input/Output	380 pF typ
Isolation resistance	Input/Output (500 VDC)	> 1'000 M Ohm
Switching frequency		300 kHz typ. (Pulse frequency modulation PFM)
Safety standards		UL 1950 , IEC 60950, EN 60950 Compliance up to 60 VDC input voltage (SELV limit)
Safety approval		UL /cUL File E188913

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Case material	Steel chrome-nickel plated
Baseplate	Epoxy
Potting material	Silicon rubber TSE (flammability to UL 94V-0)
Weight	14 g (0.55 oz)
Soldering temperature	max. 260 °C / 10 sec.

Outline Dimensions mm (inches)

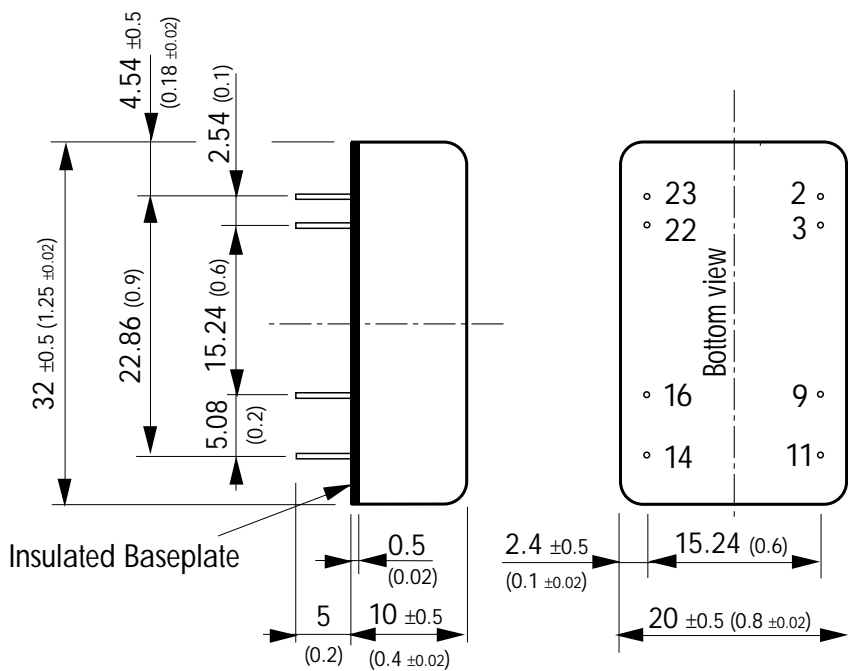

Pin-Out

Pin	Single	Dual
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No pin	Common
11	No function	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 ±0.002)
 Tolerances ± 0.5 (0.02)

Specifications can be changed without notice