


## Accessories - Optical separation / lateral cover

### End plates

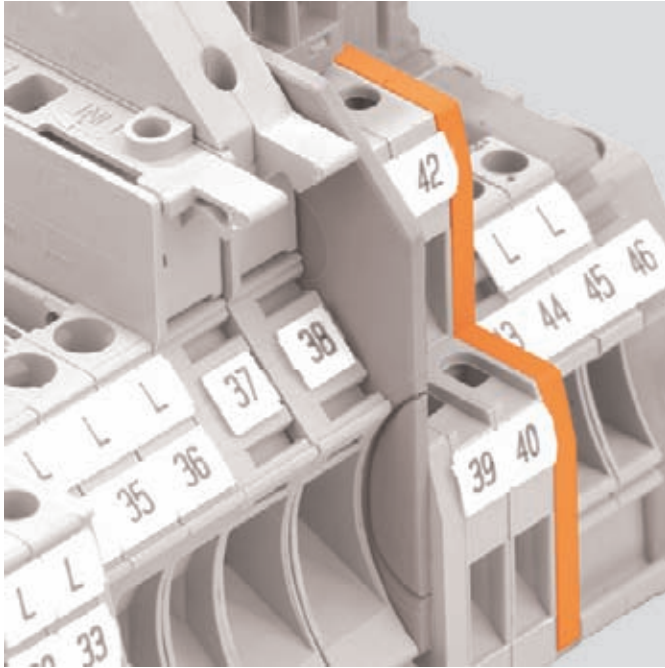

#### Touch protection

With only a few exceptions, the last terminal in a terminal strip must be closed off with a WAP/AP-type end plate. End plates must also be used within a terminal strip when it makes use of terminals of different sizes. This ensures the touch-safe requirement is met for live voltage components. The terminals are touch-safe (DIN VDE 0106-100).

#### Optical separation

Coloured end plates are very frequently used for distinguishing the circuits visually.

#### Ensuring the operating voltage

End plates can also be used to maintain the required clearance and creepage distances, in order to guarantee the rated voltage for the application. They can be used when cross-connections are used side-by-side.

**Contour matching** The overall dimensions of the end plates match the external dimensions of the associated terminal.

#### Mounting

The end plate's snap-in pegs allow it to be simply fitted on to the corresponding terminal. The corresponding indentations in the terminal are used to ensure that position follows the identical contours. All colour variations are classified according to UL 94 V-0.

### Ordering data

Type	Colour	Qty	Order No.	For terminal:
WAP 2.5-10	dark beige	50	1050000000	WDU 1.5/ZZ
WAP 2.5-10 BL	blue/light blue	50	1050080000	WDU 1.5/ZZ BL
WAP 2.5-10 BR	brown	50	1050070000	WDU 10
WAP 2.5-10 GE	yellow	50	1050020000	WDU 10 BL
WAP 2.5-10 GE	yellow	50	2068740000	WDU 10 SL
WAP 2.5-10 GN	green	50	1072200000	WDU 10 SL/EN
WAP 2.5-10 GR	grey	50	1050050000	WDU 10 SL/EN SW
WAP 2.5-10 GR 7042	grey	50	1879290000	WDU 2.5
WAP 2.5-10 OR	Orange	50	1050060000	WDU 2.5 BL
WAP 2.5-10 RT	red	50	1050040000	WDU 2.5 F 2X2.8
WAP 2.5-10 SW	black	50	1050010000	WDU 2.5 FF 2*2.8
WAP 2.5-10 VI	violet	50	1072210000	WDU 2.5/1.5/ZR
WAP 2.5-10 WS	white	50	1050090000	WDU 2.5/1.5/ZR BL
				WDU 2.5/TC TYP B
				WDU 2.5/TC TYP E
				WDU 2.5/TC TYP J
				WDU 2.5/TC TYP K
				WDU 2.5/TC TYP N
				WDU 2.5/TC TYP SR
				WDU 2.5/TC TYP T
				WDU 4
				WDU 4 BL
				WDU 4 SL
				WDU 4 SL/EN
				WDU 4 SL/EN SW
				WDU 6
				WDU 6 BL
				WDU 6 SL
				WDU 6 SL/EN
				WDU 6 SL/EN SW
				WDUL 4 100R/0.75W POTI
				WDUL 4 10K/0.75W POTI
				WDUL 4 10R/0.75W POTI
				WDUL 4 1K/0.75W POTI
				WDUL 4 500K/0.1W POTI
				WDUL 4 500R/0.75W POTI
				WDUL 4 50K/0.75W POTI
				WDUL 4 5K/0.75W
				WDUL 4 OHNE POTI
				WNT 10 10X3
				WNT 10 10X3 BE
				WNT 2.5 10X3
				WNT 2.5 10X3 BE
				WNT 4 10X3
				WNT 4 10X3 BE
				WNT 6 10X3
				WNT 6 10X3 BE
				WPE 1.5/ZZ
				WPE 10
				WPE 2.5