



FAST RECOVER RECTIFIER

1N4933 THRU 1N4937

VOLTAGE RANGE
CURRENT


50 to 600 Volts
1.0 Ampere

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012 ounce, 0.33 grams

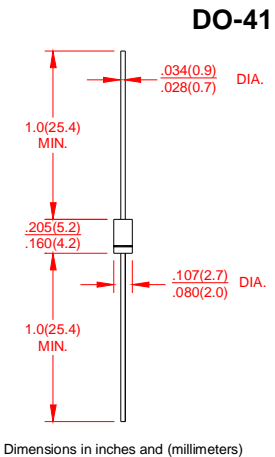

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	1N4933	1N4934	1N4935	1N4936	1N4937	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0					Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	30					Amps
Maximum Instantaneous Forward Voltage @ 1.0A	V_F	1.2					Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_A = 25^\circ\text{C}$					μA
		$T_A = 100^\circ\text{C}$					
Maximum Reverse Recovery Time (Note 3) $T_J=25^\circ\text{C}$	t_{rr}	200					ns
Maximum Reverse Recovery Current (NOTE 3)	$I_{RM(REC)}$	2.0					Amps
Typical Junction Capacitance (Note 1)	C_J	15					pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50					$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	(-55 to +150)					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	(-55 to +150)					$^\circ\text{C}$

Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0Volts.
- 2 Thermal Resistance from junction to Ambient at .375”(9.5mm)lead length, P.C.board mounted.
- 3.Reverse Recovery Test Conditions: $I_f=1.0\text{A}$, $V_r=30\text{V}$, $di/dt=50\text{A}/\mu\text{s}$, $I_{rr}=10\%$ $I_{rr}=10\%$ I_{rm} for the measurement of t_{rr} .



FAST RECOVER RECTIFIER

1N4933 THRU 1N4937

VOLTAGE RANGE
CURRENT

50 to 600 Volts
1.0 Ampere

RATING AND CHARACTERISTIC CURVES 1N4933 THRU 1N4937

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

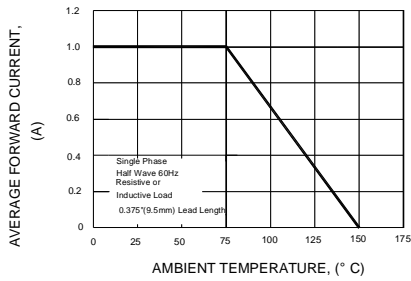


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

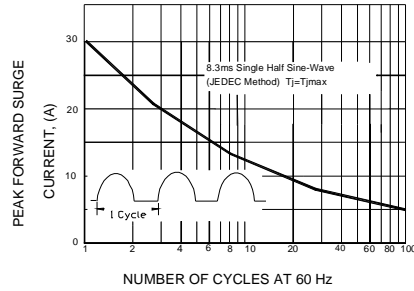


FIG.4-TYPICAL REVERSE CHARACTERISTICS

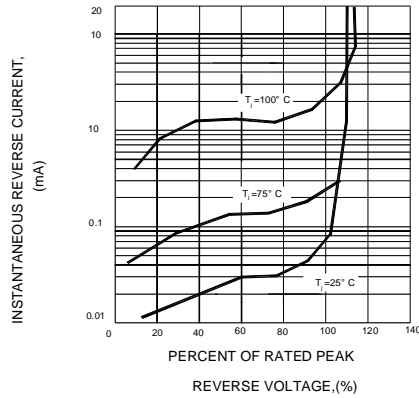


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

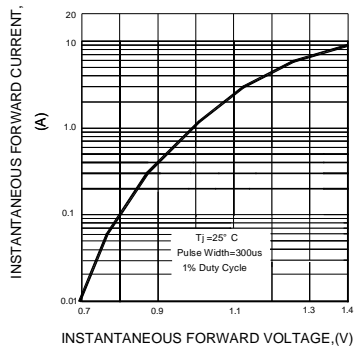


FIG.5-TYPICAL JUNCTION CAPACITANCE

