


Circuit diagram

Model: LP8551119LC		Overcharge Detection Voltage(V)	4.28±0.05
Min.Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)		Overdischarge Detection Voltage(V)	3.0±0.1
Battery pack specification (电池组规格) Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)		Limited to Max loading current 仅用于最大的负载电流 peak value (A)	constant (A) 持续 1.0 (A)
Nominal Voltage 标称电压 (V)		Customer required Max loading current 客户要求最大的负载电流 peak value (A)	constant (A) 持续 (A)
Internal impedance 内阻 (≅) (mΩ, AC 1KHz)		Battery protection Related Value: (相关的电池保护值)	
Charge Temp. 充电温度 (°C)		If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如实际应用中的负载电流大于EEMB提供值, 请提出来, 实际的应用请识别对PCM的设计至关重要)	
Discharge Temp. 放电温度 (°C)		Ambient Conditions (环境温度)	
Humidity (湿度)		Humidity (湿度)	

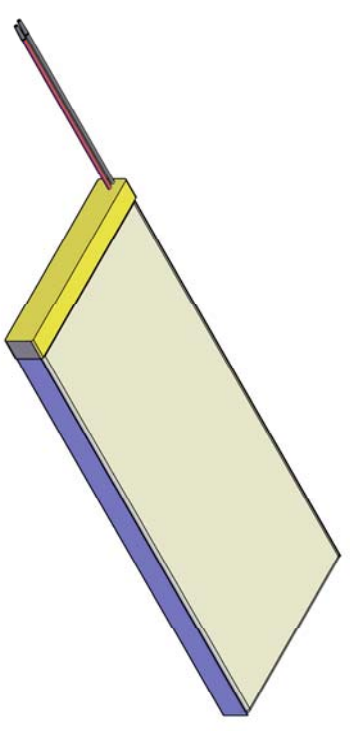

		Drawn:	Zhuhaoran	Revise No.:	E4-2009
		Checked 1:	CoCo	Projection:	
Title		Checked 2:		Page:	1/1
File NO.		Approved:		Scale:	1:2
A07964		Draw Date:	2013/04/25	Unit:	mm

Remark(备注):  
1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).  
2. RoHS compliant(严格按照ROHS要求生产).