



#### Features

- ◆ Single-in-Line Package (SIP)
- ◆ Single and Dual Output Models
- ◆ I/O-Isolation 1'000 VDC
- ◆ High Efficiency up to 81%
- ◆ Operating Temperature  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- ◆ Industry Standard Pinout
- ◆ 100% Burn-in (8 h)
- ◆ Lead free Design, RoHS compliant
- ◆ 3 Year Product Warranty



The TMA series are miniature, isolated 1 W DC/DC-converters in a Single-in-Line package (SIP). Requiring only 1.2 cm<sup>2</sup> board space they offer the ideal solution in many space critical applications for board level power distribution. The use of SMD-technology makes it possible to offer a product with high performance at low cost.

#### Models

Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMA 0505S	5 VDC $\pm$ 10%	5 VDC	200 mA	71 %
TMA 0512S		12 VDC	80 mA	78 %
TMA 0515S		15 VDC	65 mA	78 %
TMA 0505D		$\pm$ 5 VDC	$\pm$ 100 mA	72 %
TMA 0512D		$\pm$ 12 VDC	$\pm$ 40 mA	78 %
TMA 0515D		$\pm$ 15 VDC	$\pm$ 35 mA	79 %
TMA 1205S	12 VDC $\pm$ 10%	5 VDC	200 mA	73 %
TMA 1212S		12 VDC	80 mA	80 %
TMA 1215S		15 VDC	65 mA	80 %
TMA 1205D		$\pm$ 5 VDC	$\pm$ 100 mA	74 %
TMA 1212D		$\pm$ 12 VDC	$\pm$ 40 mA	81 %
TMA 1215D		$\pm$ 15 VDC	$\pm$ 35 mA	81 %
TMA 1505S	15 VDC $\pm$ 10%	5 VDC	200 mA	73 %
TMA 1512S		12 VDC	80 mA	80 %
TMA 1515S		15 VDC	65 mA	80 %
TMA 1505D		$\pm$ 5 VDC	$\pm$ 100 mA	74 %
TMA 1512D		$\pm$ 12 VDC	$\pm$ 40 mA	81 %
TMA 1515D		$\pm$ 15 VDC	$\pm$ 35 mA	81 %
TMA 2405S	24 VDC $\pm$ 10%	5 VDC	200 mA	71 %
TMA 2412S		12 VDC	80 mA	78 %
TMA 2415S		15 VDC	65 mA	79 %
TMA 2405D		$\pm$ 5 VDC	$\pm$ 100 mA	72 %
TMA 2412D		$\pm$ 12 VDC	$\pm$ 40 mA	79 %
TMA 2415D		$\pm$ 15 VDC	$\pm$ 35 mA	80 %

### Input Specifications

Input current no load /full load	5 Vin models	30 mA / 260 mA typ.
	12 Vin models	12 mA / 110 mA typ.
	15 Vin models	12 mA / 100 mA typ.
	24 Vin models	7 mA / 55 mA typ.
Surge voltage (1 sec. max.)	5 Vin models	9 V max.
	12 Vin models	18 V max.
	15 Vin models	21 V max.
	24 Vin models	30 V max.
Reverse voltage protection		0.3 A max.
Reflected input ripple current		can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter		internal capacitors

### Output Specifications

Voltage set accuracy		± 3 %
Voltage balance (dual output models)		± 1 % max.
Regulation	– Input variation – Load variation 20 – 100 %	± 1.2 % / 1 % change Vin ± 10 % max.
Ripple and noise (20 MHz Bandwidth)		75 mV pk-pk max.
Temperature coefficient		± 0.02 % / K
Short circuit protection		limited 1 sec. max.
Capacitive load	– Single output models – Dual output models	220 µF max. 100 µF max.

### General Specifications


Temperature ranges	– Operating	–40 °C ... +85 °C
	– Case temperature	+95 °C max.
	– Storage	–40 °C ... +105 °C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217E)		>2'000'000 h @ 25 °C
Isolation voltage	Input/Output	1'000 VDC
Isolation capacity	Input/Output	60 pF typ.
Isolation resistance	Input/Output	>1'000 Mohm
Switching frequency		100 kHz typ. (Frequency modulation)
Frequency change over line and load		± 30 % max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Case material		non conductive black plastic (UL 94-V0 rated)
Package weight	- Single output models - Dual output models	2.1 g (0.07 oz) 2.6 g (0.09 oz)
Soldering temperature		max. 265°C / 10 sec

**Outline Dimensions mm (inches)**

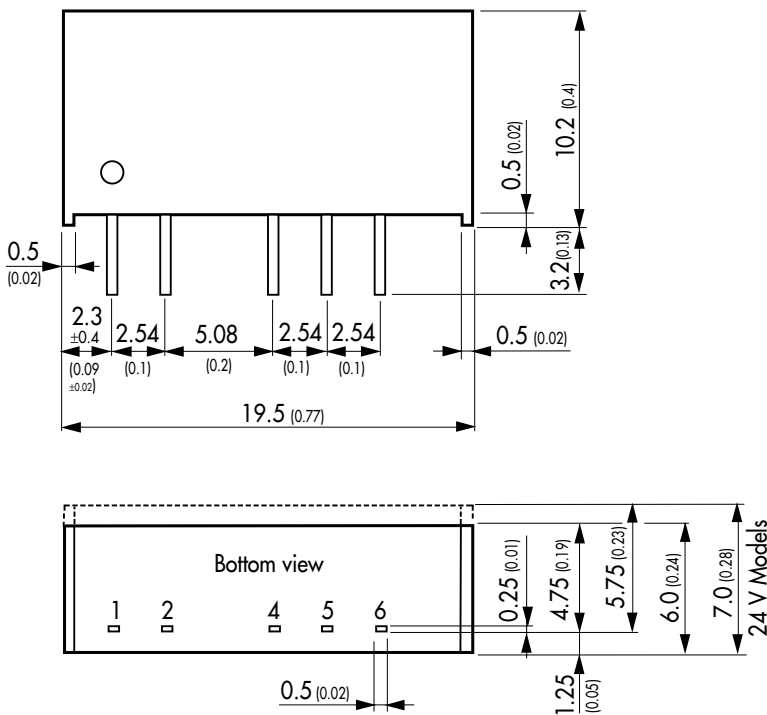

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
4	-Vout	-Vout
5	No pin	Common
6	+Vout	+Vout

Tolerances ±0.25 (0.01)  
pins ±0.05 (0.002)

Specifications can be changed without notice